


designed and created for your needs

50-60m water nebulizer



30kVA

Generator required



Designed to provide an exceptional level of performance for every work on site ensuring the right balance between power and ease of use

TKS-60 SKID

more sustainable
and environmentally
friendly future




TRIME[®]

Dust Suppression

SKID



50-60m water nebulizer

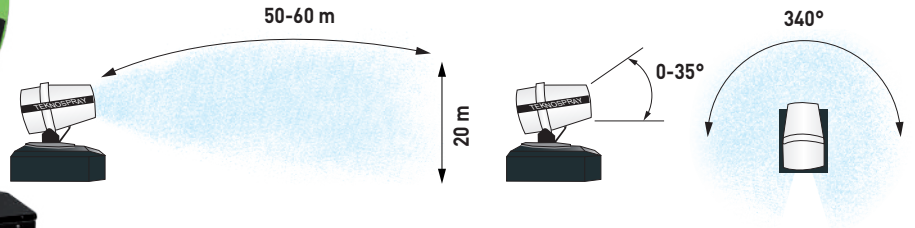

ZERO
emissions

100%
Electric engine
powered

APPLICATIONS



FEATURES

- ✔ Integrated control panel
- ✔ SMART START SYSTEM
- ✔ Emergency stop button
- ✔ Phase inverter
- ✔ Water pump
- ✔ Water pressure Gauge
- ✔ Water Safety pressure switch
- ✔ Manual water drain system
- ✔ Central lifting eye
- ✔ Forklift pockets
- ✔ Stainless steel crown with 24 nozzles
- ✔ Galvanized SKID base with forklift pockets

SAFETY

- ✔ Reduce dust for healthy and safe environment
- ✔ Safety automatic clutch compliant with HSE norm
- ✔ Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto

OPTIONS

- ✔ 60 Hz
- ✔ External pump for chemicals additives

R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electric motor-water pump - oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

Technical data

Electric engine power (kW)	22
Inlet plug	400V3P+N+T 50Hz 32A
Fan diameter (mm)	900
Water consumption (l/m)	37 - 43
Coverage (without wind) (m)	50 - 60
Water connection	UNI 45 or STORZ or CAMLOCK
Max. water throw height (m)	20
Min. inlet Water pressure (bar)	1.0
Generator required (kVA)	30
Water inlet filter (Mesh)	60
Y Filter (µm)	500
Electric tilting system	0 - 35°
Automatic oscillation	0 - 340°
Dimensions (mm)	1719x1345x2065
Weight (kg)	870

