




IAPER RAINO FL-T001

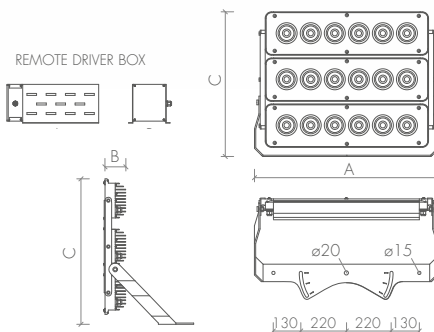

90°





IAPER RAINO


| code | W tot. | °K | model | Kg | LUMEN LED | LUMEN OUTPUT | replace |
|---------------|--------|------|-------|-------|--------------------|--------------------|--------------|
| FL-T001-A0001 | 1200 | 4000 | PM | 38,00 | 199871 lm - CRI≥80 | 141621 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0002 | 1350 | 4000 | PM | 38,00 | 222409 lm - CRI≥80 | 157527 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0003 | 1200 | 4000 | PM | 28,00 | 199871 lm - CRI≥80 | 141621 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0004 | 1350 | 4000 | PM | 28,00 | 222409 lm - CRI≥80 | 157527 lm - CRI≥80 | 2000W JM/SAP |

| A (mm) | B (mm) | C (mm) |
|--------|--------|--------|
| 720 | 155 | 680 |
| 720 | 155 | 680 |
| 720 | 105 | 680 |
| 720 | 105 | 680 |

GR = Driver remoto / Remote driver

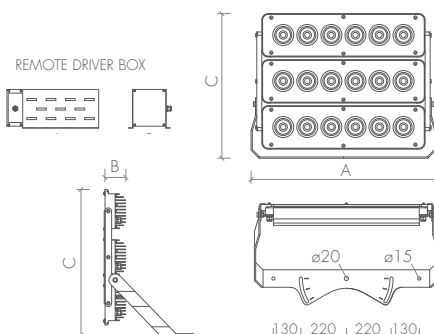

29°





IAPER RAINO


| code | W tot. | °K | model | Kg | LUMEN LED | LUMEN OUTPUT | replace |
|---------------|--------|------|-------|-------|--------------------|--------------------|--------------|
| FL-T001-A0005 | 1200 | 4000 | CR | 38,00 | 199871 lm - CRI≥80 | 153895 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0006 | 1350 | 4000 | CR | 38,00 | 222409 lm - CRI≥80 | 171180 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0007 | 1200 | 4000 | CR | 28,00 | 199871 lm - CRI≥80 | 153895 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0008 | 1350 | 4000 | CR | 28,00 | 222409 lm - CRI≥80 | 171180 lm - CRI≥80 | 2000W JM/SAP |

| A (mm) | B (mm) | C (mm) |
|--------|--------|--------|
| 720 | 155 | 680 |
| 720 | 155 | 680 |
| 720 | 105 | 680 |
| 720 | 105 | 680 |

GR = Driver remoto / Remote driver

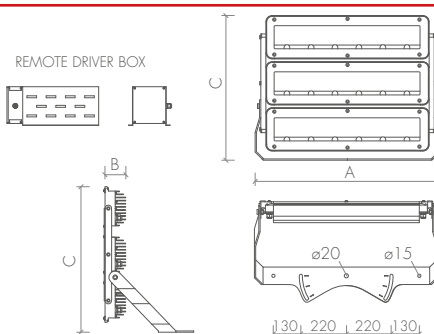

55°



IAPER RAINO

| code | W tot. | °K | model | Kg | LUMEN LED | LUMEN OUTPUT | replace |
|---------------|--------|------|-------|-------|--------------------|--------------------|--------------|
| FL-T001-A0009 | 1200 | 4000 | AR | 38,00 | 199871 lm - CRI≥80 | 151063 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0010 | 1350 | 4000 | AR | 38,00 | 222409 lm - CRI≥80 | 168029 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0011 | 1200 | 4000 | AR | 28,00 | 199871 lm - CRI≥80 | 151063 lm - CRI≥80 | 2000W JM/SAP |
| FL-T001-A0012 | 1350 | 4000 | AR | 28,00 | 222409 lm - CRI≥80 | 168029 lm - CRI≥80 | 2000W JM/SAP |

| A (mm) | B (mm) | C (mm) |
|--------|--------|--------|
| 720 | 155 | 680 |
| 720 | 155 | 680 |
| 720 | 105 | 680 |
| 720 | 105 | 680 |

GR = Driver remoto / Remote driver



TRIME s.p.a.
Strada per Robecco, snc - 20081 Cassinetta di Lugagnano (MI) - Italy
Tel. +39 02 942 1724 - www.trime.it - info@trime.it