



designed and created
for your needs

30-40m
water 
nebulizer

Designed to provide
an exceptional level
of performance
for every work on site
ensuring the right
balance between power
and ease of use




15kVA
Generator required

TKS-40



more sustainable
and environmentally
friendly future

30-40m water nebulizer

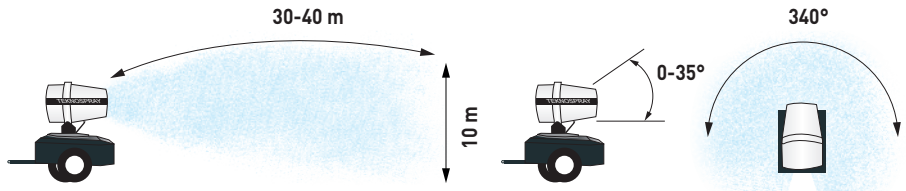

ZERO
emissions

100%
Electric engine
powered

APPLICATIONS



FEATURES

- ✓ Integrated control panel
- ✓ SMART START SYSTEM
- ✓ Emergency stop button
- ✓ Phase inverter
- ✓ Water pump
- ✓ Water pressure Gauge
- ✓ Water Safety pressure switch
- ✓ Manual water drain system
- ✓ Central lifting eye
- ✓ Forklift pockets
- ✓ Stainless steel crown with 24 nozzles
- ✓ 3 height adjustable stabilizers
- ✓ Equipped with big size wheels for off-road site

SAFETY

- ✓ Reduce dust for healty and safe enviroment
- ✓ Safety automatic clutch compliant with HSE norm
- ✓ Remote control with full operation
 - start/stop
 - tilt up/down
 - turn left/right/auto

OPTIONS

- ✓ 60 Hz
- ✓ 110V 50Hz 32A
- ✓ Booster Water Pump

R.O.T. SYSTEM

- Remote control, 50m range programmable function "cicle" to start electricmotor-water pump - oscillation with only one button
- Automatic oscillation 0 - 340° manual area setting
- Electric Tilting System

Technical data

Electric engine power (kW)	7,5
Inlet plug	400V3P+N+T 50Hz 32A
Fan diameter (mm)	900
Water consumption (l/m)	37 - 43
Coverage (m)	30 - 40
Water connection	UNI 45 or STORZ or CAMLOCK
Max. water throw height (m)	10
Min. inlet Water pressure (bar)	1.0
Generator required (kVA)	15
Water inlet filter (Mesh)	60
Y Filter (µm)	500
Electric tilting system	0 - 35°
Automatic oscillation (working angle settable manually)	0 - 340° manual area setting
Dimensions min (mm)	2077x1836x2230
Dimensions max (mm)	2877x1836x2230
Weight (kg)	800

